

NB15EDGRHSC-THR-3.5-XXP

接线端子-插座

额定电流: 7 A


额定电压: 150 V

间距: 3.5 mm


极数: 2P~24P

安装: 回流焊

尺寸图
Dimensions

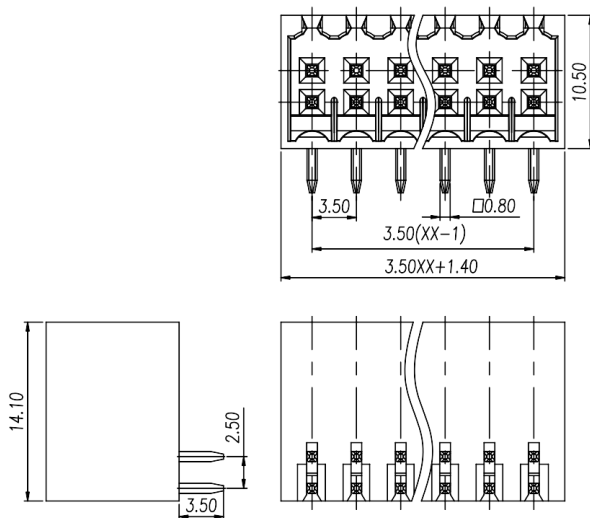

PCB开孔图
PCB Opening diagram



仅供参考，实际规格依产品工程图为准 版本2.0



技术数据-UL/CUL

| | | | |
|----------------------------------|-------|---|---|
| 等级 Use Group | B | C | D |
| 额定电压 Rate Voltage | 150V | - | - |
| 额定电流 Rated Current | 7A | - | - |
| 接线范围 Wire Range | / | | |
| 耐电压 Dielectric Voltage-Withstand | 1.3KV | | |

技术参数-IEC

| | | | |
|------------------------------------|-------|-------|-------|
| 过电压类别 Overvoltage Category | III | III | II |
| 污染等级 Contamination Class | 3 | 2 | 2 |
| 额定电压 Rated Voltage | 80V | 125V | 200V |
| 额定电流 Rated Current | 10A | 10A | 10A |
| 额定冲击电压 Impulse withstand voltage | 1.5KV | 2.5KV | 2.5KV |
| 导线截面积[硬/柔] Conductor cross section | / | | |

材料 Material

| | |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material | PA66 |
| 阻燃等级 Flame retardant rating | UL94V-0 |
| 导体材料 Conductor Material | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated |

一般参数 Other Data

| | |
|----------|-------|
| 间距 Pitch | 3.5mm |
|----------|-------|

| | |
|----------------------------|-------------|
| 极数 Poles | 2*2 -2P~24P |
| 剥线长度 Stripping Length | / |
| 螺丝 Screw | / |
| 扭矩 Torque | / |
| 工作温度 Operating temperature | -40~+105 |
| 焊锡温度 Soldering temperature | 260 /5S |
| 引针尺寸 Pin dimensions | 0.8*0.8mm |
| PCB板孔径 PCB Hole Diameter | Ø1.4mm |

商业数据

| | | | |
|------|-------------------------|----|----|
| 产品型号 | NB15EDGRHSC-THR-3.5-XXP | | |
| 产品编号 | - | | |
| 包装方式 | 内袋 | 内盒 | 外箱 |



宁波佳绩机电科技有限公司
佳绩电子科技（宁波）有限公司

地址：宁波市海曙区高桥镇新港路8号

邮编：315000

总机：+86 574-55665696

传真：+86 574-55842261

邮箱：shangwu@nbjiaji.com

Ningbo jiaji Electronics Co.,Ltd

Address: No. 8 Xingang Road, Gaoqiao Town,
Haishu District, Ningbo City, Zhejiang Province

Zip code: 315000

Switchboard: +86 574-55665696

Fax: +86 574-55842261

E-mail: shangwu@nbjiaji.com